

# Accessories

## Air Inlet Hoods

The air inlet hoods and air stack caps listed are the standard line inlet accessories for all styles of air cleaners.

An air inlet hood or air stack cap shields the air cleaner intake from rain, snow and large particles of foreign matter such as twigs, hay, straw, etc.




Fig. A


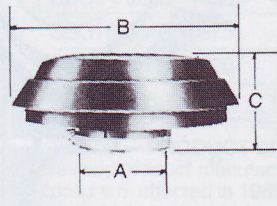


Fig. B

| Part No.   | Figure | Dimensions in Inches |            |          | Approx Height Added to Stack | Rain Shroud | Weight lb |
|------------|--------|----------------------|------------|----------|------------------------------|-------------|-----------|
|            |        | A Fits Tube O.D.     | B Hood Dia | C Height |                              |             |           |
| GAH00-2068 | B      | 1.75                 | 6.0        | 3.4      | 2.8                          | No          | .3        |
| GAH00-8207 | B      | 2.0                  | 6.0        | 3.4      | 2.6                          | No          | .3        |
| GAX00-2019 | A      | 2.25                 | 5.25       | 3.97     | 3.5                          | No          | .8        |
| GAH00-8208 | B      | 2.5                  | 6.0        | 3.4      | 2.4                          | No          | .3        |
| GAH00-8209 | B      | 3.0                  | 6.0        | 3.4      | 2.1                          | No          | .3        |
| GAH00-8210 | B      | 4.0                  | 8.7        | 4.06     | 2.9                          | No          | .5        |
| GAH00-0473 | B      | 3.75                 | 11.5       | 5.12     | 3.62                         | Yes         | 1.0       |
| GAH00-0471 | B      | 4.5                  | 11.5       | 4.88     | 3.38                         | Yes         | 1.0       |
| GAH00-0469 | B      | 5.0                  | 11.5       | 4.82     | 3.3                          | No          | 1.0       |
| GAH00-0604 | B      | 5.5                  | 16.0       | 5.75     | 4.09                         | Yes         | 1.8       |
| GAH00-0606 | B      | 6.0                  | 16.0       | 5.75     | 4.09                         | Yes         | 1.8       |
| GAH00-0607 | B      | 7.0                  | 16.0       | 5.75     | 4.09                         | Yes         | 1.8       |

## Mounting Bands


Rigid mounting and air tight connections are requisites to a good air cleaner installation. Mounting bands, (two required per cleaner, except STG models *Donac lone*® which require one mounting band per cleaner), are shown in the dimensional composite.

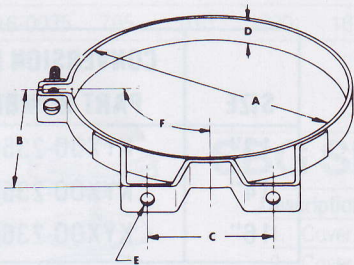

| Part Number | Dimensions in Inches |      |      |      |     |     | Weight lb | Maximum Bolt Torque ft. lb |
|-------------|----------------------|------|------|------|-----|-----|-----------|----------------------------|
|             | A                    | B    | C    | D    | E   | F   |           |                            |
| P90-0767    | 4.0                  | 2.5  | 3.25 | .75  | .34 | 90° | 0.3       | 1.5                        |
| P00-4055    | 4.38                 | 2.69 | 3.25 | .75  | .34 | 90° | 0.4       | 1.5                        |
| P00-2348    | 5.25                 | 3.19 | 3.25 | .88  | .34 | 90° | 0.7       | 1.5                        |
| P00-2351    | 6.0                  | 3.56 | 3.25 | 1.0  | .34 | 90° | 0.8       | 1.5                        |
| P00-7191    | 6.5                  | 3.88 | 3.75 | .88  | .41 | 90° | 0.7       | 2.0                        |
| P90-0345    | 7.0                  | 4.12 | 3.75 | .88  | .41 | 90° | 0.8       | 2.5                        |
| P00-4307    | 8.0                  | 4.5  | 4.25 | 1.0  | .34 | 90° | 1.1       | 4.0                        |
| P00-4073    | 9.0                  | 5.12 | 4.5  | 1.25 | .45 | 90° | 1.4       | 4.0                        |
| P00-4076    | 10.19                | 5.75 | 5.0  | 1.25 | .44 | 90° | 1.5       | 4.0                        |
| P00-4079    | 11.0                 | 6.13 | 5.0  | 1.25 | .44 | 90° | 1.8       | 4.0                        |
| AAH00-0329  | 11.81                | 6.88 | 6.0  | 1.56 | .41 | 90° | 2.5       | 4.0                        |
| AAH00-0350  | 14.0                 | 8.12 | 8.00 | 1.56 | .47 | 90° | 3.7       | 5.0                        |
| AAH00-0351  | 16.0                 | 9.12 | 10.0 | 1.56 | .47 | 90° | 3.11      | 5.0                        |

## Hose Clamps

### Heavy Duty T-Bolt Stainless Steel Hose Clamps

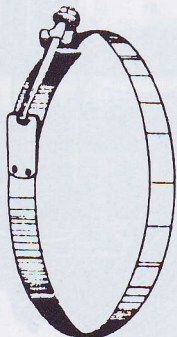

These clamps are ideal for use where critical seals are required as the .75" wide stainless steel clamp allows proper sealing of rubber components to transfer tubes. The recommended maximum torque for the clamps is 80 inch lb. Normally sufficient rubber deformation is evident and sealing achieved with torque in the 40 to 60 inch lb range.

Note that for large and intermediate diameters, two standard clamps may be joined to obtain a clamp of the desired diameter (eg P14-8337 and P14-8338 result in a 5.25" nominal diameter clamp, P14-8340 and P14-8343 may be used in place of P14-8307). Greater adjustment results when clamps are joined together.

|   | Tube Size on which the rubber component is to be clamped | Nominal Clamp Dia. |
|---|--|--------------------|
| P14-8337                                  | 2"   | (2.50")            |
| P14-8338                                  | 2 1/4"   | (2.75")            |
| P14-8339                                  | 2 1/2"   | (3.00")            |
| P14-8340                                  | 2 3/4"   | (3.25")            |
| P14-8341                                  | 3"   | (3.50")            |
| P14-8342                                  | 3 1/2"   | (4.00")            |
| P14-8343                                  | 4"   | (4.50")            |
| P14-8344                                  | 4 1/2"   | (5.00")            |
| P14-8345                                  | 5"   | (5.50")            |
| P14-8346                                  | 5 1/2"   | (6.00")            |
| P14-8347                                  | 6"   | (6.50")            |
| P14-8348                                  | 7"   | (7.62")            |
| P14-8307                                  | 7"   | (7.75")            |
| (for use with thick wall rubber adapters) |  |                    |
| P14-8349                                  | 8"   | (8.62")            |