


Don't be caught in the water without this Racor gasoline spin-on fuel filter/water separator. The 490R-RAC-01 is designed for high performance applications and with a flow rate of 90 GPH, your engine will perform better than ever with clean, water-free fuel. Its hand (palm) operated fuel priming pump simplifies servicing procedures and yields extremely low flow resistance due to its unique pump bypass characteristic.

The 490R-RAC-01 features a high capacity Aquabloc®II filter element that removes sediment down to 10 micron. The spin-on filter design is simple to replace and the reusable, see-thru contaminant collection bowl features a self-venting drain for removing unwanted solids and water. The mounting head is anodized and coated with a durable electrostatically applied white powder coating for superior corrosion resistance. That's the quality you've learned to expect from Racor.

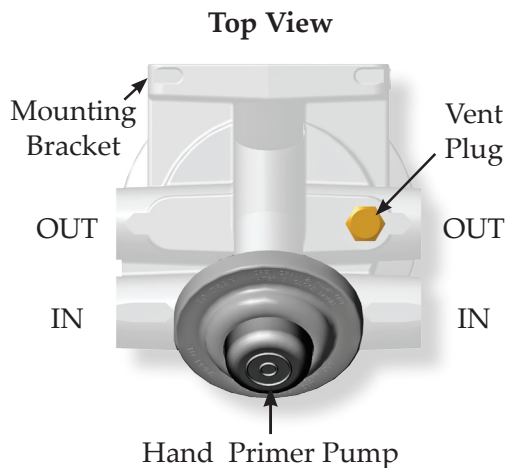

Specifications	490R-RAC-01
Application:	Outboard
Maximum Flow Rate	90 GPH (340 LPH)
Replacement Element	S3227 (10 micron)
Center Threads	1"-14
Port Size	3/8"-18 NPTF
Height	9.9 in. (25.1 cm)
Width	4.5 in. (11.4 cm)
Depth	4.8 in. (12.1 cm)
Weight (dry)	2.6 lb (1.2 kg)
Clean Pressure Drop	0.95 PSI (6.5 kPa)
Maximum Pressure	7 PSI (0.5 bar)
Underbowl Clearance	1.0 in. (2.5 cm)
H ₂ O Removal Efficiency	99%
Operating Temperature	-40° to +255°F (-40° to +124°C)

Product Bulletin #7630 - January 7, 2005

Parker Hannifin Corporation
 Racor Division
 PO Box 3208
 Modesto, CA 95354 USA
 Phone: 800.344.3286
 Fax: 209.529.3278
 E-mail: racor@parker.com

Visit our website at:
www.parker.com/racor

