


Mobile Fuel Filtration

1

Turbine Series

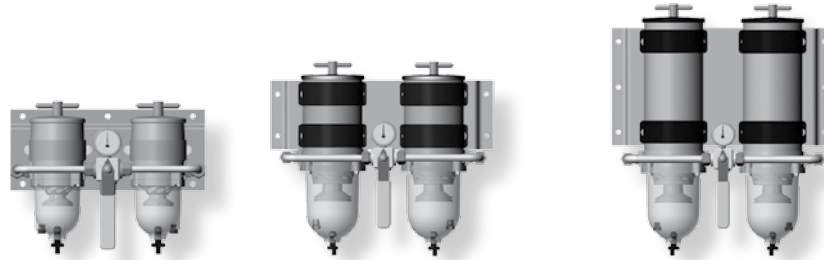

Specifications	75500FGX	75900FHX	751000FHX
Maximum Flow Rate: (one unit online) (two units online) (three units online)	60 GPH (227 LPH) 120 GPH (454 LPH) N/A	90 GPH (341 LPH) 180 GPH (681 LPH) N/A	180 GPH (681 LPH) 360 GPH (1363 LPH) N/A
Port Size (female threads)	3/4"-16 UNF (SAE J1926 female threads)	7/8"-14 UNF (SAE J514 male threads)	7/8"-14 UNF (SAE J514 male threads)
Min. Service Clearance: (above assembly) (below assembly)	5.0 in. (12.7 cm) 2.0 in. (5.1 cm)	7.5 in. (19.1 cm) 2.0 in. (5.1 cm)	10.0 in. (25.4 cm) 2.0 in. (5.1 cm)
Replacement Element: (2 micron) (10 micron) (30 micron)	(2 Per Assembly) 2010SM-OR 2010TM-OR 2010PM-OR	(2 Per Assembly) 2040SM-OR 2040TM-OR 2040PM-OR	(2 Per Assembly) 2020SM-OR 2020TM-OR 2020PM-OR
Height	11.5 in. (29.2 cm)	17.0 in. (43.2 cm)	22.0 in. (55.9 cm)
Depth	9.5 in. (24.1 cm)	11.0 in. (27.9 cm)	11.0 in. (27.9 cm)
Width	14.5 in. (36.8 cm)	18.8 in. (47.8 cm)	18.8 in. (47.8 cm)
Weight (dry)	17.0 lb (7.7 kg)	23.0 lb (10.4 kg)	30.0 lb (13.6 kg)
Clean Pressure Drop	0.7 PSI (4.8 kPa)	1.7 PSI (11.7 kPa)	3.7 PSI (25.5 kPa)
Maximum Pressure ¹	15 PSI (1 bar)	15 PSI (1 bar)	15 PSI (1 bar)
Water In Bowl Capacity: (per bowl)	3.7 oz (109 ml)	10.3 oz (305 ml)	10.3 oz (305 ml)
Available Options: ² (water detection kit) (12 or 24 volt dc heater) (vacuum gauge)	Yes Yes Yes	Yes Yes Yes	Yes Yes Yes
H ₂ O Removal Efficiency	99%		
Operating Temperature	-40° to +255°F / -40° to +124°C		

¹ Pressure installations are applicable up to the maximum PSI shown. Vacuum installations are recommended.
² Not for use on gasoline applications.